浪紋式超微粒磨粉機

採自動控制進料系統,無篩無網,細度採高效能空氣分離設計,無灰塵,集塵系統 採循環式,主機部份具有水冷卻系統裝置,(必要時可加裝冷凍機)強力結構設計 可耐高壓衝擊,清理保養簡單容易

Auto-control feeding system, fineness efficiently separated by air, neither screen nor net;

Water Cooling System devised in the main machine, a chiller may be equipped while it's necessary.

■ 適用原料

食品、化工、化學、礦石、纖維、中藥、豆類等等。

Application

Foodstuffs, chemicals, sandstones, fibers, herbs, beans.

磨輪和磨壁的使用壽命

The lifetime of grind-wheel & grind-wall are analyzed as follows.

原料名稱 The name of raw materials	使用小時/天 Working hr / daily	磨輪使用壽命 Lifetime of grinding-wheel	磨壁使用壽命 Lifetime of grinding-wall
粉質、纖維類 Powder, Fibers	8 hr	4-5 years	I2 years
化工、食品類 Chemicals, Foodstuffs	8 hr	4-5 years	10 years
礦石、金屬類 Mineral stone, Metals	8 hr	I-2 years	3 years



- 依研磨原料不同而設計不同磨輪及磨壁花紋。
- In according with various materials required, the grains of grind-wheel and grind-wall are devisable.





The 1st Plant

機械設備製造廠 Machinery Manufacturing Plant



2nd & 3rd Plants

機械設備製造廠 / 橡膠粒磨粉暨研究中心 Machinery Manufacturing Plant
Crumb Rubber Milling Plant and R&D Center



4th Plant

大小廢輪胎廠每日16小時處理研究中心。 Various Tire Types Recycling Plant which Operating for 16hrs / daily and R&D Center.



10476 台北市中山區復興北路476號3F 3rd F, No. 476, Fuhsing N. Rd., Taipei 10476, Taiwan. T. +886-2-25018600∼3 F. +886-2-25030142 SIN SHENG KUANG ELECTRIC & MACHINERY INDUSTRIAL CO., LTD. E. d28962@ms31.hinet.net / sskmachinery@gmail.com

www.ssk.com.tw / www.sskmachinery.com







產量 Capacity

SK-AS

Vertical T Type Super Micro Grinder

T型豎軸式超微粒磨粉機

採自動控制進料系統,無篩無網,細度採高效能空氣分離設計,集塵系統循環式、

Auto-control feeding system, neither scree nor sieve designed, efficient air-separation, dust-free operation and circulative dust collector.

■ 適用原料

食品、化工、化學、礦石、豆類等等。

Application

Foodstuffs, chemicals, sandstones, beans.

Grind-wall T type Blade-shaft

SK-ASW

要時可加裝冷凍機)。

require for low temperature.

could be equipped, if necessary).

主機具有水冷卻系統裝置,使用於需要低溫操作的一些原

料如樹脂、砂糖、藥品、化學品等或連續長時間使用(必

Resin, sugar, medicine, chemical and heat-sensitive materials

The main machine with water-jacketed chamber, which is


continuously cooled by re-circulative cooling water (A chiller

細度 Fineness	馬力 Power	產量 Capacity
50-500目,可任意調整 50-500 Mesh, Adjustable.	60, 100, 150HP	10~3,000公斤 / 小時(依原料、細度、馬力不同而定) 10~3,000 kg / hr, varies with different materials, fineness and powers.

SK-AM

The Blending & Grinding Complete Line

各種產品磨粉混合整廠流程

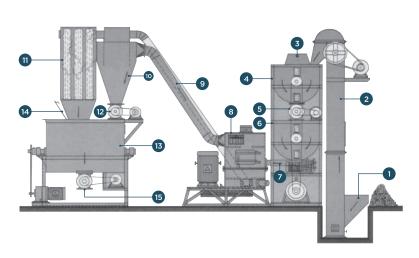

1	原料進料□ Raw Material Feeder	8	超微粒磨粉機 Super Micro Grinder
2	原料提升機 Material Feeding Elevator	9	粉體輸送管 Powder Pipeline
3	液體添加設備(噴霧式) Spray Equipment	10	集料桶 Cyclone Tank
4	前段混合式 Primary Blender	11)	集塵袋 Dust Filter
5/12	出料機 Rotary Valve	(13)	精密混合機 Precise Blender
6	第二段混合式 Secondary Blender	(14)	備用進料□ Spare Feeder
7	螺旋式進料機 Screw Feeder	(15)	出料機 Rotary Valve

SK-ASE

Anti-explosive Powder Grinder

防爆型磨粉機

本機具有水冷卻系統及防爆裝置。

With water-jacketed chamber circulative cooling system and anti-explosive device.

■ 特殊原料應用範圍

適用於硫磺及各種易爆炸物等。





(Standard Type) Vertical T Type

(標準型)T型豎軸式超微粒磨粉機

SK-A

Super Micro Grinder

細度 Fineness	馬力 Power
50-500目,可任意調整 50-500 Mosh, Adjustable	20, 40HP

產量 Capacity

10~3.000公斤 / 小時(依原料、細度、馬力不同而定) 10~3,000 kg / hr, varies with different materials, fineness and powers.

SK-FM

Crumb Rubber Grinder

橡膠粒磨粉機

本科技系橡膠磨粉機,全冷卻系統可24小時生產。 磨盤係採用特殊碳化鎢鋼,可耐長時間運作。

This professional rubber grinder is equipped with full cooling system, it's available for running 24hr daily.

The grinding plate of grinder is made of special carbide tungsten steel, it endures long-time operation.





細度 Fineness

自20-30-40-50-60-80目,可自行調整

20-30-40-50-60-80 Mesh, Adjustable.













SK-F

Plastic & Rubber Super Micro Powder Pulverizer

塑膠、橡膠超微粒粉碎機

- 自動控制進料系統,本機内固定刀及迴轉刀採用碳鎢鋼材特殊精密製造,刀軸 角度剪力最大,絶無粉塵末飛揚。(磨刀耐用一年以上)
- 本機具水冷卻裝置,必要時可加冷凍機,不生高溫。
- 固定刀片四支,拆裝刀片及清料換網容易
- 本機設有自動連續進料及人工進料裝置,方便操作
- 噪音小,保養容易,故障率低。
- Automatic controlling feeding system. The fixed & rotary blades are specially made of carbide-tungsten steel. It's the most cutting force on the angle of blades shaft and without dust float in the air. The grind-blades are available for over one year.
- To reduce high temp. during operation, the main machine is equipped with water-jacket chamber, which is continuously cooled by re-circulating cooling water. An additional chiller could be assembled while it's necessary.
- 4 fixed blades, easily disassemble for cleaning blades and screen
- With both automatic & manual feeding design for user's choice.
- Low voice, easy to maintain and low failure rate.

■ 適用原料

橡膠類、塑膠類、纖維類、發泡類、皮革類等等

Application

Rubbers, plastics, fibers, foams, leathers.











細度 Fineness	馬力 Power	產量 Capacity
I0-60目,可任意調整 I0-60 Mesh, Adjustable.	30, 50, 75HP	依原料、細度、馬力不同而定 Varies with different material, fineness and power.